

PATENT  
450110-03712

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


Applicants : Stephen Mark KEATING et al.  
Serial No. : 10/006,294  
Filed : December 6, 2001  
For : EMBEDDING DATA IN MATERIAL  
Art Unit : 2121

745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to:  
Assistant Commissioner for Patents  
Washington, D.C. 20231, on February 7, 2002

Bruno Polito, Reg. No. 38,580

Name of Applicant, Assignee or  
Registered Representative

  
Signature

February 7, 2002  
Date of Signature

CLAIM OF PRIORITY

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:


In support of the claim of priority under 35. U.S.C. § 119 asserted in the Declaration accompanying the above-entitled application, as filed, please find enclosed herewith certified copies of U.K. Application Nos. 0029855.4 and 0029860.4, filed in U.K. on 7 December 2000 and 7 December 2000, respectively, forming the basis for such claim.

PATENT  
450110-03712

Acknowledgment of the claim of priority and of the  
receipt of said certified copy(s) is requested.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants

By:   
\_\_\_\_\_  
Bruno Polito  
Reg. No. 38,580  
Tel. (212) 588-0800

Enclosure(s)



INVESTOR IN PEOPLE



## CERTIFIED COPY OF PRIORITY DOCUMENT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 2006 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


30 NOV 2001

05 APR 2000

Patent  
Office



08DEC00 E589717-37 D02246  
0.00-0029855.4



# Request for a grant of a patent

(See the notes on the back of this form you can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference P009757GB RWP

2. Patent application number  
(The Patent Office will fill in this part)

0029855.4

3. Full name, address and postcode of the  
or of each applicant  
(underline all surnames)

Sony United Kingdom Limited  
The Heights  
Brooklands  
Weybridge  
KT13 0XW  
United Kingdom

Patents ADP number (if you know it)

06522700003

If the applicant is a corporate body, give  
the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

Embedding Data in Material and Removing the  
Embedded Data

5. Name of your agent (if you have one)

D YOUNG & CO

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

21 NEW FETTER LANE  
LONDON  
EC4A 1DA

Patents ADP number (if you know it)

59006 ✓

6. If you are declaring priority from  
one or more earlier patent  
applications, give the country and  
date of filing of the or each of these  
earlier applications and (if you know  
it) the or each application number

Country

Priority application  
number  
(if you know it)

Date of filing  
(day/month/year)

1st	GB	0008439.4 <sup>2</sup> WAT 8.1.01	5 Apr 2000
2nd	GB	0019977.8	14 Aug 2000
3rd			

NO 31/3/01

11/3 23/3/01

7. If this application is divided or otherwise  
derived from an earlier UK application,  
give the number and filing date of the  
earlier application

Number of earlier  
application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document
- |                                  |         |
|----------------------------------|---------|
| Continuation sheets of this form | 0       |
| Description                      | 21      |
| Claim(s)                         | 5       |
| Abstract                         | 1       |
| Drawing(s)                       | 10 X 10 |

10. If you are also filing any of the following, state how many against each item
- |  |   |
|--|---|
| Priority Documents   | 0 |
| Translation of Priority Documents  | 0 |
| Statement of inventorship and right to grant of a patent (Patents Form 7/77) | 0 |
| Request for preliminary examination and search (Patents Form 9/77)           | 1 |
| Request for substantive examination (Patents Form 10/77)                     | 0 |
| Any other documents (Please specify)   | 0 |

11. I/We request the grant of a Patent on the basis of this application.

Signature

Date

**D YOUNG & CO**  
Agents for the Applicants

7 Dec 2000

12. Name and daytime telephone number of person to contact in the United Kingdom
- |               |              |
|---------------|--------------|
| Richard Pratt | 023 80719500 |
|---------------|--------------|

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheets should be attached to this form.

d) If you answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

**Embedding data in material and removing the embedded data**

The present invention relates to embedding data in material and removing the embedded data. Embodiments of the invention relate to watermarking of material.

In this application, material means any one or more of video material, audio  
5 material and data material. Video is generic to still and moving images.

Steganography is the embedding of data into material such as video material, audio material and data material in such a way that the data is imperceptible in the material.

Watermarks are data embedded in material such as video material, audio  
10 material and data material. A watermark may be imperceptible or perceptible in the material.

A watermark may be used for various purposes. It is known to use watermarks for the purpose of protecting the material against, or trace, infringement of the intellectual property rights of the owner(s) of the material. For example a watermark  
15 may identify the owner of the material.

Watermarks may be "robust" in that they are difficult to remove from the material. Robust watermarks are useful to trace the provenance of material which is processed in some way either in an attempt to remove the mark or to effect legitimate processing such as video editing or compression for storage and/or transmission.  
20 Watermarks may be "fragile" in that they are easily damaged by processing which is useful to detect attempts to remove the mark or process the material.

Visible watermarks are useful to allow e.g. a customer to view an image e.g. over the Internet to determine whether they wish to buy it but without allowing the customer access to the unmarked image they would buy. The watermark degrades the  
25 image and the mark is preferably not removable by the customer. Visible watermarks are also used to determine the provenance of the material into which they are embedded.

When material has been watermarked it is desirable to be able to remove the mark. However, embedding a watermark in the material in such a way as to make  
30 difficult unauthorised removal may also have the consequence that the watermark is difficult to remove by an authorised person.

According to a first aspect of the invention there is provided:-

a) A method of removing data embedded in material comprising the steps of:

receiving material in which data is embedded;

5 accessing an information store storing information enabling the data to be removed; and

removing the said data using the enabling data accessed from the store.

b) A method comprising the steps of:

embedding data in material; and

10 storing in an information store information for enabling the data to be removed from the material.

---

c) Apparatus for removing data embedded in material comprising:

an input for receiving material in which data is embedded;

15 an information store for storing information enabling the data to be removed; and

a remover arranged to remove the said data using the enabling data accessed from the store.

20 d) Apparatus comprising:

an embedder for embedding data in material;

a store for storing information for enabling the data to be removed from the material; and

25 a generator for generating the enabling information when the said data is embedded in the material.

The provision of the stored enabling data allows access to enabling data which allows the embedded data to be removed. In preferred embodiments of this aspect of the invention, the enabling data is stored in a manner which is secure against unauthorised access to it. Methods of preventing unauthorised access to secure data  
30 are well known.

It has also been found that, in for example video material, embedding watermarks in identical fashion in different images results in differing degrees of difficulty in removing the watermarks.

According to a second aspect of the present invention, there is provided a method comprising the steps of:

embedding data in first material to produce second material in which data is embedded;

removing the data from the second material to produce recovered material;

comparing the first and recovered material to determine the differences and locations of differences therebetween; and

storing corrections which correct the said differences and data identifying the said locations at which the differences occur in the first material.

The second aspect also provides apparatus for embedding data in material comprising:

an embedder for embedding data in first material to produce second material in which data is embedded;

a remover for removing the data from the second material to produce recovered material;

a comparator for comparing the first and recovered material to determine the differences and locations of differences therebetween; and

a store for storing data identifying the said locations and corrections which correct the said differences.

According to a third aspect of the present invention there is provided a method of removing data embedded in material, the data being embedded in the material according to the embedding method of said second aspect, the removing method comprising the steps of:

removing the data from the second material to produce recovered material;

deriving the said corrections and locations from a store storing data identifying the said locations and corrections which correct the said differences; and

using the corrections to correct the recovered material at the said locations.



The third aspect also provides apparatus for removing data from material in which the data has been embedded by the apparatus of said second aspect, the removing apparatus comprising:

5 a remover for removing the data from the second material to produce recovered material;

a deriver for deriving the said corrections and locations from the said store; and

a corrector arranged to use the stored corrections to correct the recovered material at the said locations.

The invention also provides a system comprising a combination of the  
10 apparatus of the said second aspect (herein after a data embedder) and the apparatus of said third aspect (herein after a data remover).

---

Ideally, the aspects of the invention operate optimally with a lossless channel between the embedding apparatus and the removing apparatus. If the channel between the embedding apparatus and the removing apparatus is known, an emulator emulating  
15 that channel may be provided in the embedding apparatus between the embedded and remover of the embedding apparatus.

For a better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 is a schematic block diagram of an illustrative watermark embedding  
20 and removal system in accordance with the present invention;

Figure 2 is a more detailed schematic block diagram of an embedder of the system of Figure 1;

Figures 3A and B illustrate an example of a window of coefficients and how the window relates to a coefficient  $C_i$  being modified to embed a bit of a watermark;

25 Figure 4 is a flow diagram of a method of calculating strength  $\alpha$  in accordance with an example of the invention;

Figure 5 is a schematic block diagram of a watermark decoder;

Figure 6 is a schematic block diagram of a watermark remover;

Figure 7 is a flow diagram of a method of calculating strength  $\alpha$  in accordance  
30 with an example of the invention;

Figure 8 is a schematic diagram of an alternative, illustrative, set of coefficients usable to calculate  $\alpha$ ;

Figures 9 and 10 are diagrams used herein below to describe wavelets transforms; and

Figures 11 and 12 are diagrams of data structures of UMIDs.

#### Overview

Figure 1 illustrates a system, in this example a watermarking system, for embedding a watermark onto an image I and for recovering and removing it from the image. The watermarking system 10 comprises: a source 110 of the image I; a sub-system A for applying the watermark; a sub-system B for detecting and removing the watermark; a 'lossless' channel C linking the sub-systems A and B; and a database D.

In overview, the subsystem A applies the watermark to the image. The watermarked image is transmitted via the lossless channel C to the subsystem B where the watermark is detected and removed. It is desired to restore the original image in the subsystem B with no degradation. For that purpose, at the subsystem A the watermark is removed from the image by a remover 130 and the thus restored image is compared with the original image I to detect differences and the locations within the image of the differences. The database D stores the locations of differences and correction data which may be values of the original image at those locations or the differences. The subsystem B detects and removes the watermark to produce a substantially restored image. The removal process is the same as at the subsystem A. The locations of corrections and the corrections are read from the database and the corrections applied to the restored image to correct it. In practice the system will operate on many images. Thus it is necessary to identify the images and the correction data associated therewith in the database D. In this example each image is identified by an identifier which is used to access the relevant data in the database. Preferably the identifier is a UMID. UMIDs are described in the section *UMIDs* below. Most preferably the watermark comprises the UMID. In the example of Figure 1, the image is transformed by a wavelet transform. Wavelet transforms are discussed in the section *Wavelets* below. In the example of Figure 1 wavelet coefficients are compared to determine the said differences.

#### First Example

Referring to Figure 1, the source 110 produces a spatial domain image I. An embedder 120 receives a UMID from a generator 115 and embeds the UMID as the

watermark in wavelet coefficients  $C_i$  of a wavelet transform (T) of the image according to

$$C_i' = C_i + \alpha.R_i$$

Where  $C_i$  is the  $i^{\text{th}}$  original image coefficient,  $C_i'$  is the  $i^{\text{th}}$  modified coefficient,  $R_i$  is  $i^{\text{th}}$  bit of watermark data and  $\alpha$  is a scaling factor. As described hereinafter  $R_i$  may be a bit of a pseudo random symbol sequence modulated by the UMID data  $W_i$ .

The remover 130 removes the watermark to produce restored coefficients  $C_i''$  according to

$$C_i'' = C_i' - \alpha.R_i$$

10 A comparator 125 compares the restored coefficients  $C_i''$  with the original coefficients  $C_i$  to determine any differences and the locations thereof. The differences and locations  $i$  are stored in the database D together with the UMID generated by generator 115.

The coefficients  $C_i'$  produced by the embedder 120 are inverse transformed  
15  $(T^{-1})$  and applied to the channel C.

The subsystem B receives the watermarked image from the channel C. A transformer T recreates the coefficients  $C_i'$ . The UMID is detected and removed by a detector and remover 127. The detected UMID is used to access the correction data in the data base and the correction data is applied to the image coefficients  $C_i''$  in a  
20 corrector 129 to restore the original coefficients  $C_i$  which may be inverse transformed  $(T^{-1})$  to restore the original image I.

In this first example,  $\alpha$  is a fixed predetermined value. Using a fixed predetermined value of  $\alpha$  facilitates removal of the watermark.

#### Second Example

25 The second example is identical to the first except that a channel emulator 121 is provided between the embedder 120 and remover 130. The emulator applies, to the output of the embedder, a channel emulator function emulating the effect of channel C on the output of the embedder.

The channel emulation 121 emulates the channel C. Thus errors introduced by  
30 the channel C can be detected and corrections stored in the database D.

This is useful especially if the channel C is lossy.

### Third Example

This modifies the first or second example in that  $\alpha$  is not fixed. The embedder 120 is described with reference to Figures 2 to 4 and the remover 130, 127 is described with reference to Figures 5 to 7.

5 Figure 2 illustrates the watermark embedder 120 in more detail. The watermark embedder 120 comprises pseudo-random sequence generator 220, an error correction coding generator 200, a wavelet transformer 210, an inverse wavelet transformer 250, a first combiner 230, a data converter 225 and a second combiner 240. The wavelet transformer 210 includes a frame store FS1. The inverse  
10 transformer 250 includes a frame store FS2. The frame store FS1 stores a frame of unmodified coefficients  $C_i$ . The frame store FS2 stores a frame of modified coefficients  $C_i'$ .

The error correction coding generator 200 receives the UMID and outputs an error correction coded UMID to the first combiner 230. The pseudo-random sequence  
15 generator 220 outputs a pseudo-random binary sequence (PRBS)  $P_i$ , where  $i$  is the  $i^{\text{th}}$  bit of the sequence, to the first combiner 230. The PRBS has a length  $L \times J$  of bits where  $J$  is the number of bits in the error correction encoded UMID. Each bit  $j$  of the error correction encoded UMID then modulates a section of length  $L$  of the PRBS. The first combiner 230 logically combines the error correction encoded UMID with the  
20 PRBS to produce a watermark having bits  $R_i$ . A bit  $W_j=0$  of the error correction encoded UMID inverts  $L$  bits of the PRBS. A bit  $W_j=1$  of the error correction encoded UMID does not invert the PRBS. Thus bits  $W_j$  of the error correction encoded UMID are spread over  $L$  bits of the PRBS. The data converter 225 converts binary 1 to symbol  $+1$  and binary 0 to symbol  $-1$  to ensure that binary 0 bits contribute to a  
25 correlation value used in the decoder of Figure 5.

The wavelet transformer 210 receives the video image  $I$  from the source 110 and outputs wavelet coefficients to the second combiner 240. Wavelets are briefly discussed in the section *Wavelets* below.

The second combiner 240 receives the watermark  $R_i$ , the wavelet coefficients  
30  $C_i$  and watermark strength  $\alpha_i$  and outputs modified coefficients  $C_i'$  where

$$C_i' = C_i + \alpha_i R_i$$

The inverse wavelet transformer 250 receives the modified coefficients  $C_i'$  and outputs a spatial domain watermarked image  $I'$ .

The embedder includes an ECC generator 200. The use of error correction coding to produce an error correction coded UMID is advantageous since it allows the UMID 175 to be reconstructed more readily should some information be lost. This provides a degree of robustness to future processing or attacks against the watermark. The use of a pseudo-random sequence  $P_i$  to generate a spread spectrum signal for use as a watermark is advantageous since it allows the error correction coded UMID 205 to be spread across a large number of bits. Also, it allows the watermark to be more effectively hidden and reduces the visibility of the watermark. Applying the watermark to a wavelet transform of the image is advantageous since this reduces the perceptibility of the watermark. Furthermore, the strength of the watermark is adjusted by  $\alpha_i$  to control the visibility of the watermark.

The operation of the error correction code generator 200 will now be described. The error correction code generator 200 receives a UMID. Typically the UMID will be a binary sequence of 31 bytes. The error correction code generator 200 typically outputs a 511 bit error correction coded binary sequence. Various error correction coding schemes are known. One approach uses BCH coding which corrects up to 31 bit errors. The error correction rates can be further improved by using knowledge of the UMID format to help correct errors. One such approach is to check for invalid dates times GPS locations etc.

The watermark is preferably embedded in predetermined regions of the wavelet transformed image. Most preferably the upper horizontal (hH,IV) and upper vertical (lH,hV) bands are used. These bands are chosen as watermarks embedded in these regions are not readily perceptible. The length of the pseudo-random sequence may be chosen such that the watermark fills the predetermined regions in each wavelet image.

#### Calculating $\alpha_i$ , Figures 3 and 4.

In accordance with an illustrative embodiment of the invention, for each coefficient  $C_i$ , a value of  $\alpha_i$  is calculated.  $\alpha_i$  is calculated as

$$\alpha_i = F \{C_n\}_i,$$

where  $\{C_n\}_i$  is a set of unmodified wavelet coefficients excluding  $C_i$ , which set may vary with  $i$ , that is respective values of  $\alpha_i$  are functions  $F$  of respective sets  $\{C_n\}_i$ . This is shown as step S8 in Figure 4.

5 The coefficients  $C_{n_i}$  of the set may be in the same wavelet band as  $C_i$  or may be in different bands from  $C_i$  and from each other as described below with reference to Figure 8.

If the coefficients are in the same band as  $C_i$ , they are preferably in a window adjacent  $C_i$ . For example the set comprises  $N$  coefficients  $C_{i-1}$  to  $C_{i-N}$  as shown in Figure 3 and the embodiment will be described in the following with reference to that.

10 The number  $N$  of coefficients may vary with  $C_i$ ; thus for generality  $N$  is denoted as  $N_i$ .

The function  $F$  may be any suitable function. In this illustrative embodiment  $F$  is such that

$$\alpha_i = F\{C_n\}_i = \frac{1}{N_i} \sqrt{\sum C_n^2} \text{ for } n = i-1 \text{ to } i-N \text{ for } N_i \neq 0 \text{ and } \alpha_i = k \text{ for } N_i = 0.$$

15 Figure 3A is a map of wavelet coefficients in a frame store 300, the coefficients being in level 1 of a wavelet transform. In a preferred embodiment, the coefficients  $C_i$  are modified only in the upper horizontal hH, lV and upper vertical lH, hV bands to embed the watermark. However, coefficients in other bands and/or in other levels may be modified to embed a watermark. In the following only band hH, lV is considered.

20 The wavelet coefficients are stored in the frame store 300 (also denoted FS1 in Figure 2) and in this example are stored as shown in Figure 3A grouped in the bands. The coefficients are serially ordered. For example they may be serially ordered by a raster scan thereof. Other scanning patterns are known. Assuming serial ordering of the coefficients in each band, for each coefficient  $C_i$  to be modified, there is defined a set  $\{C_n\}_i$  (herein also referred to as a 'window') of  $N_i$  coefficients excluding  $C_i$ . The set  $\{C_n\}_i$  consists of the  $N_i$  coefficients  $C_{i-1}$  to  $C_{i-N_i}$  preceding coefficient  $C_i$  on the same line, up to a maximum of for example  $M$  most recent coefficients. It will be noted that in the band hH, lV coefficient  $C_1$  has no preceding coefficients,  $C_2$  has only one preceding coefficient, and so on. For coefficient  $C_1$   $\alpha_i$  is set to a predetermined value  $K$ . For subsequent coefficients the set comprises the totality of preceding coefficients.

30

Thus  $\alpha_i$  is defined individually for each coefficient  $C_i$  to be modified. In the example above it is defined by the set of  $N_i$  unmodified coefficients preceding  $C_i$ . By choice of the appropriate function  $F$ ,  $\alpha_i$  is adapted to the image such that image degradation can be minimised. In addition as will be discussed below in the section

5 *Remover*, this allows  $\alpha_i$  to be recalculated from the watermarked image coefficients, after those have been restored to their original values. This improves the accuracy of restoring the original image.

Referring to Figure 4 the illustrative procedure for calculating  $C_i'$  is as follows:-

10 The calculation procedure starts at step S2. At step S4,  $i$  is initiated with value 0. At step S6,  $i$  is incremented by 1 to calculate  $\alpha_1$  at step S8 for coefficient  $C_1'$ . At step S10 the value of modified coefficient  $C_1'$  is calculated. The procedure then reverts to step S6 and  $i$  is incremented. The procedure continues until all coefficients have been modified.

15 In addition, the calculation of  $\alpha$  may be modified in one or both of the following ways:-

- 1) If  $\alpha_i < \alpha_{TL}$ , it is incremented to  $\alpha_{TL}$ , where  $\alpha_{TL}$  is a lower threshold; and if  $\alpha_i > \alpha_{TH}$  it is reduced to  $\alpha_{TH}$ , where  $\alpha_{TH}$  is an upper threshold.
  - 2) The magnitude  $|C_n|$  of each coefficient is compared with a threshold  $C_{TH}$ .
- 20 If  $|C_n| > C_{TH}$  then  $C_n$  is not included in the calculation of  $\alpha_i$ ; or if  $|C_n| > C_{TH}$   $C_n$  is clipped to  $(C_n / |C_n|)C_{TH}$

#### Watermark decoder and remover. Figures 5 and 6.

##### Decoder Figure 5

25 The operation of the watermark decoder 140 will now be explained in more detail with reference to Figure 5. The watermark decoder 140 receives the watermarked image  $I'$  and outputs the restored UMID. The watermark decoder 140 comprises a wavelet transformer 310, a reference pseudo-random sequence (PRBS) generator 320, a correlator 330, a selector 340 and a error correction coding decoder

30 350. The PRBS generated by the generator 320 is identical to that generated by the

PRBS generator 220 of Figure 2 and converted by a data converter (not shown) to values +1 and -1 as described above.

The wavelet transformer 310 receives the watermarked image I' and, in known manner, outputs the modified wavelet coefficients Ci'. The correlator 330 receives the  
 5 reference pseudo-random sequence PRBS having symbols Pi of values +1 and -1 from the pseudo-random sequence generator 320, and the wavelet coefficients Ci' and outputs a watermark image bit correlation sequence 335. The watermarked image bit correlation sequence is determined in the following way.

The modified wavelet coefficients  $Ci' = Ci + \alpha_i R_i$  where  $R_i$  are bits of PRBS  
 10 modulated by error-correction encoded bits Wj of UMID. In the example given above there are 511 bits Wj. Each bit Wj modulates L bits of PRBS. There are JL bits in the modulated PRBS.

For each error correction encoded bit Wj, the correlator 330 calculates a correlation value

$$15 \quad S'_j = \sum_{i=jL+1}^{jL+L} Ci' . Pi$$

where  $j = 0, 1, 2 \dots T-1$ , and T is the number of error correction encoded bits. In this example  $T=511$ . A sequence 335 of correlation values  $S'_j$  is produced.

The correlation sequence 335 is received by the selector 340 which outputs an uncorrected UMID 345. The selector 340 outputs a bit value "1" for a value of S' greater than 0 and a bit value "0" for S' less than or equal to 0. The error correction  
 20 code decoder 350 receives the uncorrected UMID 345 and in known manner outputs the restored UMID 145.

The reference PRBS Pi is synchronised with the modulated PRBS in the watermarked image. For that purpose a synchroniser (not shown) is used. Such  
 25 synchronisation is known in the art.

#### Remover Figure 6.

The watermark remover 130 receives the restored UMID 145, and the watermarked image I' and outputs a restored image I". The watermark remover 130 comprises a pseudo-random sequence generator 420 for generating a reference pseudo-  
 30 random sequence Pi identical to that produced by generators 220 and 320, a spread



spectrum signal generator 430 which produces, via a data converter 425, a restored watermark  $R_i'$  having bit values +1 and -1 from the restored UMID 145 and the pseudo-random sequence  $P_i$ . The reference sequence  $P_i$  is synchronised with the modulated sequence in the watermarked image in known manner.

- 5        The watermark remover 130 further comprises a wavelet transformer 410 which produces modified wavelet coefficients  $C_i'$  from the watermarked image  $I'$ , a strength estimator 460 for calculating  $\alpha$  and a combiner 440 which calculates restored wavelet coefficient values according to the equation

$$C_i = C_i' - \alpha_i \cdot R_i'.$$

- 10        The restored wavelet coefficients  $C$  are fed to an inverse wavelet transformer 450 which outputs the restored image  $I''$ .
- 

#### Calculating $\alpha_i$ , Figure 7.

- 15        In accordance with the illustrative embodiment of the invention,  $\alpha_i$  is calculated in the embedder as described above in the section *Calculating  $\alpha$* . The estimator 460 of the remover of Figure 6 recalculates  $\alpha$  in analogous manner from coefficients  $C_i$  which have been restored to their original values.

- 20        Thus referring for example to Figure 3A and to Figures 6 and 7, the modified coefficients  $C_i'$  are stored in a frame store 300 indicated as FS3 in the wavelet transformer of Figure 6 in the same way as shown in figure 3A and they are serially ordered in the same way as described with reference to Figure 3A. It will be recalled that coefficient  $C_i'$  has no preceding coefficients so  $\alpha_1 = k$  and  $C_1 = C_1' - kR_1$ . For each subsequent coefficient  $C_i$ ,  $\alpha_i$  is calculable from the set  $N_i$  of preceding restored coefficients, all of which have been restored to their original value according to
- 25         $C_i = C_i' - \alpha_i \cdot R_i'$ .

- Referring to Figure 7, the calculation procedure starts at step S5. At step S7,  $i$  is initiated to 0. At step S9,  $i$  is incremented by 1 to calculate  $\alpha_1$  at step S11 for coefficient  $C_1'$ . At step S13 the original value  $C_1$  is calculated from coefficients  $C_1'$ . The procedure then reverts to step S9 and  $i$  is incremented. The procedure continues
- 30        until all coefficients  $C_i'$  have been restored to their original values  $C_i$ .

As in the embedder of Figure 2, the calculation of  $\alpha$  may be modified in one or both of the following ways:-

- 1) If  $\alpha_i < \alpha_{TL}$ , it is incremented to  $\alpha_{TL}$ , where  $\alpha_{TL}$  is a lower threshold; and  
if  $\alpha_i > \alpha_{TH}$  it is reduced to  $\alpha_{TH}$ , where  $\alpha_{TH}$  is an upper threshold.
- 2) The magnitude  $|C_n|$  of each coefficient is compared with a threshold  $C_{TH}$ .  
If  $|C_n| > C_{TH}$  then  $C_n$  is not included in the calculation of  $\alpha_i$ ; or  
if  $|C_n| > C_{TH}$   $C_n$  is clipped to  $(C_n/|C_n|)C_{TH}$ .

#### 10      Modifications.

As mentioned above the coefficients from which the value of  $\alpha_i$  is calculated may be in different bands to the related coefficient  $C_i$  which is to be modified or restored to its original value. Thus by way of example, referring to Figure 8, the set of coefficients  $\{C_n\}_i$  used to calculate  $\alpha_i$  of band hH, IV may be in the other  
15 bands. In the example of Figure 8 the set  $\{C_n\}_i$  is shown as including coefficients  $C_{1i}$ ,  $C_{2i}$  and  $C_{3i}$  which are at positions related to the position of coefficient  $C_i$ . In this way, image properties in other bands are taken into account in calculating  $\alpha_i$  to ensure that the watermark is imperceptible.

The coefficients  $C_{1i}$ ,  $C_{2i}$  and  $C_{3i}$  used to modify or restore  $C_i$ , may be  
20 coefficient which are never modified. That can be done by modifying only coefficients in one or more bands such as hH, IV and leaving the coefficients in other bands unmodified. Alternatively at least some of the coefficients  $C_{1i}$ ,  $C_{2i}$  and  $C_{3i}$  used to modify or restore  $C_i$  may be modified. That can be done by storing the coefficients in a frame store 300 as shown in Figure 3 or 8 and by reading out  
25 coefficients in an order which allows the procedures of Figures 4 and 7 to be followed.

It will be appreciated that whilst the foregoing discussion refers for ease of explanation to only 3 coefficients  $C_{1i}$ ,  $C_{2i}$  and  $C_{3i}$  in 3 bands in one level, in practice many more coefficients may be used and the coefficients may be in more than three bands and in more than one level.

#### 30      Other transforms

Whilst the invention has been described by way of example with reference to Wavelet transforms, it may be used with other transforms for example DCT.

#### Other material

Whilst the invention has been described by way of example with reference to material comprising video material (still or moving images), it may be applied to other material, for example audio material and data material.

#### PRBS

As described hereinabove, the PRBS has a length of  $LJ$  where  $J$  is the number of bits in a UMID. Thus each bit  $W_j$  of the UMID modulates a section of length  $L$  of the PRBS. Instead, it may have a length of  $L$  bits and be repeated for each bit  $j$  of the UMID.

---

#### Other Watermark data.

Whilst the invention has been described by way of example with reference to UMIIDs as the watermark data, it may be used with other data as the watermark.

#### Using modified coefficients to calculate $\alpha$

The foregoing embodiment calculates  $\alpha$  using unmodified coefficients. In alternative embodiments  $\alpha$  is calculated using modified coefficients or a combination of modified and unmodified coefficients. The coefficients  $C_i$  are serially ordered. The coefficients used to calculate  $\alpha_i$  for coefficient  $C_i$  are coefficients preceding  $i$  on the serial order.

Referring to Figures 2, and 6 frames stores FS1, FS2, FS3 and FS4 are provided in the wavelet transformer 210, the inverse wavelet transformer 250, the wavelet transformer 410 and the inverse wavelet transformer 450. Frame stores FS1 and FS4 store unmodified coefficients. Frame stores FS2 and FS3 store modified coefficients  $C'_i$ .

Thus there are available both at the encoder and at the remover serially ordered sets of unmodified and modified coefficients.

In the embedder of Figure 2, as coefficients  $C_i$  in store FS1 are modified, they are stored in FS2 as coefficients  $C'_i$ . Thus modified coefficients  $C'_i$  are available to calculate  $\alpha_i$ . Thus the set  $\{C_n\}_i$  used to calculate  $\alpha_i$  for modifying coefficient  $C_i$  may

)  
comprise modified coefficients  $C'$  preceding  $C_i$  optionally together with unmodified coefficients  $C$  preceding  $C_i$ .

At the remover modified coefficients  $C_i'$  are stored in store FS3. Also the coefficients are restored, restored coefficients  $C_i$  are stored in store FS4. Thus  
5 modified coefficients  $C_i'$  are available to calculate  $\alpha_i$  optionally together with restored coefficients  $C_i$ .

Sets of coefficients preceding a coefficient  $C_i$  or  $C_i'$  are present in all four frame stores FS1, FS2, FS3 and FS4.

Shape of sets  $\{C_n\}_i$

10 A set  $\{C_n\}_i$  may have any convenient shape. Where  $\alpha_i$  is calculated only from coefficients preceding  $C_i$ , the set may consist of coefficients immediately preceding  $C_i$ . Where the coefficients are raster scanned to serially order them, the set may consist of coefficients on the same scanning line as  $C_i$ . Alternatively, it may consist of coefficients on that line and a preceding line. Other shapes are possible.

---

### Wavelets

Wavelets are well known and are described in for example “ A Really  
5 Friendly Guide to Wavelets “ by C Valens, 1999 and available at [www](http://www).

Valens shows that the discrete wavelet transform can be implemented as an  
iterated filter bank as used in sub-band coding, with scaling of the image by a factor  
of 2 at each iteration.

Thus referring to Figure 10, a spatial domain image is applied to a set of high  
10 pass HP and low pass LP filters. At level 1, the first stage of filtering, the image is  
filtered horizontally and vertically and, in each direction, scaled down by a factor of 2.  
In level 2, the low pass image from level 1 is filtered and scaled in the same way as in  
level 1. The filtering and scaling may be repeated in subsequent levels 3 onwards.

The result is shown schematically in Figure 9. Figure 9 is a representation  
15 normal in the art. The horizontal axis indicates increasing At level one the image is  
spatially filtered into four bands: the lower horizontal and vertical band,  $lH_1$ ,  $lV_1$ ; the  
upper horizontal band  $hH_1$ ,  $hV_1$ ; the upper vertical band  $lH_1$ ,  $hV_1$ ; and the upper  
horizontal and vertical band,  $hH_1$ ,  $hV_1$ . At level 2, the lower horizontal and vertical  
band,  $lH_1$ ,  $lV_1$  is filtered and scaled into the lower horizontal and vertical band,  $lH_2$ ,  
20  $lV_2$ ; the upper horizontal band  $hH_2$ ,  $hV_2$ ; the upper vertical band  $lH_2$ ,  $hV_2$ ; and the  
upper horizontal and vertical band,  $hH_2$ ,  $hV_2$ . At level 3 (not shown in Figure 9), the  
lower horizontal and vertical band,  $lH_2$ ,  $lV_2$  is further filtered and scaled.

### UMIDs

The Unique Material Identifier or UMID is described in SMPTE Journal March 2000. Referring to Figure 11 an extended UMID is shown. It comprises a first set of 32 bytes of basic UMID and a second set of 32 bytes of signature metadata.

5       The first set of 32 bytes is the basic UMID. The components are:

- A 12-byte Universal Label to identify this as a SMPTE UMID. It defines the type of material which the UMID identifies and also defines the methods by which the globally unique Material and locally unique Instance numbers are created.

- A 1-byte length value to define the length of the remaining part of the UMID.

10       •A 3-byte Instance number which is used to distinguish between different 'instances' of material with the same Material number.

- A 16-byte Material number which is used to identify each clip. Each Material number is the same for related instances of the same material.

15       The second set of 32 bytes of the signature metadata as a set of packed metadata items used to create an extended UMID. The extended UMID comprises the basic UMID followed immediately by signature metadata which comprises:

- An 8-byte time/date code identifying the time and date of the Content Unit creation.

20       •A 12-byte value which defines the spatial co-ordinates at the time of Content Unit creation.

- 3 groups of 4-byte codes which register the country, organisation and user codes.

Each component of the basic and extended UMIDs will now be defined in turn.

### The 12-byte Universal Label

The first 12 bytes of the UMID provide identification of the UMID by the registered string value defined in table 1.

Byte No.	Description	Value (hex)
1	Object Identifier	06h
2	Label size	0Ch
3	Designation: ISO	2Bh
4	Designation: SMPTE	34h
5	Registry: Dictionaries	01h
6	Registry: Metadata Dictionaries	01h
7	Standard: Dictionary Number	01h
8	Version number	01h
9	Class: Identification and location	01h
10	Sub-class: Globally Unique Identifiers	01h
11	Type: UMID (Picture, Audio, Data, Group)	01, 02, 03, 04h
12	Type: Number creation method	XXh

5

**Table 1: Specification of the UMID Universal Label**

The hex values in table 1 may be changed: the values given are examples. Also the bytes 1-12 may have designations other than those shown by way of example in the-table. Referring to the Table 1, in the example shown byte 4 indicates that bytes 5-12 relate to a data format agreed by SMPTE. Byte 5 indicates that bytes 6 to 10 relate to "dictionary" data. Byte 6 indicates that such data is "metadata" defined by bytes 7 to 10. Byte 7 indicates the part of the dictionary containing metadata defined by bytes 9 and 10. Byte 10 indicates the version of the dictionary. Byte 9 indicates the class of data and Byte 10 indicates a particular item in the class.

In the present embodiment bytes 1 to 10 have fixed preassigned values. Byte 11 is variable. Thus referring to Figure 12, and to Table 1 above, it will be noted that the bytes 1 to 10 of the label of the UMID are fixed. Therefore they may be replaced by a 1 byte 'Type' code T representing the bytes 1 to 10. The type code T is followed

15

by a length code L. That is followed by 2 bytes, one of which is byte 11 of Table 1 and the other of which is byte 12 of Table 1, an instance number (3 bytes) and a material number (16 bytes). Optionally the material number may be followed by the signature metadata of the extended UMID and/or other metadata.

5       The UMID type (byte 11) has 4 separate values to identify each of 4 different data types as follows:

        '01h' = UMID for Picture material

        '02h' = UMID for Audio material

        '03h' = UMID for Data material

10       '04h' = UMID for Group material (i.e. a combination of related essence).

---

The last (12th) byte of the 12 byte label identifies the methods by which the material and instance numbers are created. This byte is divided into top and bottom nibbles where the top nibble defines the method of Material number creation and the bottom nibble defines the method of Instance number creation.

#### 15       **Length**

The Length is a 1-byte number with the value '13h' for basic UMIDs and '33h' for extended UMIDs.

#### **Instance Number**

The Instance number is a unique 3-byte number which is created by one of several means defined by the standard. It provides the link between a particular  
20       'instance' of a clip and externally associated metadata. Without this instance number, all material could be linked to any instance of the material and its associated metadata.

The creation of a new clip requires the creation of a new Material number together with a zero Instance number. Therefore, a non-zero Instance number  
25       indicates that the associated clip is not the source material. An Instance number is primarily used to identify associated metadata related to any particular instance of a clip.

#### **Material Number**

The 16-byte Material number is a non-zero number created by one of several  
30       means identified in the standard. The number is dependent on a 6-byte registered port ID number, time and a random number generator.

#### **Signature Metadata**



Any component from the signature metadata may be null-filled where no meaningful value can be entered. Any null-filled component is wholly null-filled to clearly indicate a downstream decoder that the component is not valid.

#### **The Time-Date Format**

5       The date-time format is 8 bytes where the first 4 bytes are a UTC (Universal Time Code) based time component. The time is defined either by an AES3 32-bit audio sample clock or SMPTE 12M depending on the essence type.

      The second 4 bytes define the date based on the Modified Julian Data (MJD) as defined in SMPTE 309M. This counts up to 999,999 days after midnight on the 17th  
10   November 1858 and allows dates to the year 4597.

---

#### **The Spatial Co-ordinate Format**

The spatial co-ordinate value consists of three components defined as follows:

- Altitude: 8 decimal numbers specifying up to 99,999,999 metres.
- Longitude: 8 decimal numbers specifying East/West 180.00000 degrees (5  
15   decimal places active).
- Latitude: 8 decimal numbers specifying North/South 90.00000 degrees (5  
      decimal places active).

The Altitude value is expressed as a value in metres from the centre of the earth thus allowing altitudes below the sea level.

20       It should be noted that although spatial co-ordinates are static for most clips, this is not true for all cases. Material captured from a moving source such as a camera mounted on a vehicle may show changing spatial co-ordinate values.

#### **Country Code**

25       The Country code is an abbreviated 4-byte alpha-numeric string according to the set defined in ISO 3166. Countries which are not registered can obtain a registered alpha-numeric string from the SMPTE Registration Authority.

#### **Organisation Code**

30       The Organisation code is an abbreviated 4-byte alpha-numeric string registered with SMPTE. Organisation codes have meaning only in relation to their registered Country code so that Organisation codes can have the same value in different countries.

**User Code**

The User code is a 4-byte alpha-numeric string assigned locally by each organisation and is not globally registered. User codes are defined in relation to their registered Organisation and Country codes so that User codes may have the same value in different organisations and countries.

---

CLAIMS

1. A method of removing data embedded in material comprising the steps of:  
receiving material in which data is embedded;  
accessing an information store storing information enabling the data to be  
5 removed; and  
removing the said data using the enabling data accessed from the store.

2. A method comprising the steps of:  
embedding data in material; and  
10 ~~storing, in an information store, information for enabling the data to be~~  
removed from the material.

3. Apparatus for removing data embedded in material comprising:  
an input for receiving material in which data is embedded;  
15 an information store for storing information enabling the data to be removed;  
and  
a remover arranged to remove the said data using the enabling data  
accessed from the store.

20 4. Apparatus comprising:  
an embedder for embedding data in material;  
a store for storing information for enabling the data to be removed from the  
material; and  
a generator for generating the enabling information when the said data is  
25 embedded in the material.

5. A method comprising the steps of:  
embedding data in first material to produce second material in which the data is  
embedded;  
30 removing the data from the second material to produce recovered material;

comparing the first and recovered material to determine any differences and locations of differences therebetween; and

storing corrections which correct the said differences and data identifying the said locations in the first material at which the differences occur.

5

6. A method according to claim 5, further comprising applying a channel emulation to the second material, wherein the removing step produces recovered material from the second material to which the emulation function has been applied.

10

7. A method according to claim 5 or 6, wherein the storing step comprises storing, as the said corrections, the values of the first material which values occur at the said locations in the first material.

15

8. A method according to claim 5 or 6, wherein the storing step comprises storing the said differences.

9. A method according to claim 5, 6, 7 or 8, further comprising storing identification data which identifies the said material.

20

10. A method according to claim 5, 6, 7, 8 or 9, wherein the said identification data comprises an identifier which identifies the second material.

25

11. A method of removing data embedded in material, the data being embedded in the material according to the method of any one of claims 5 to 10, the removing method comprising the steps of:

removing the data from the said second material to produce recovered material;

retrieving the said corrections and locations from a store storing the said corrections which correct the said differences and the said data identifying the said locations in the first material at which the differences occur; and

30

using the said retrieved corrections to correct the recovered material at the said locations identified by the identifying data.

12 A method according to claim 10 when dependent on claim 6, wherein the using step comprises replacing the values of the recovered material at the said locations identified by the identifying data by the stored values of the first material at the said locations.

5

13. A method according to claim 11 when dependent on claim 8, wherein the using step comprises correcting the values of the recovered material at the said locations using the said stored differences.

10

14. A method according to claim 11, 12 or 13, when dependent on claim 9 further comprising the step of determining the identifier of the second material and retrieving from the said store the corrections and locations associated with the identified material.

15

15. Apparatus comprising:

an embedder for embedding data in first material to produce second material in which data is embedded;

a remover for removing the data from the second material to produce recovered material;

20

a comparator for comparing the first and recovered material to determine the differences, and locations of differences, therebetween; and

a store for storing data identifying the said locations and corrections which correct the said differences.

25

16. Apparatus according to claim 15, further comprising a channel emulator between the embedder and remover.

17. Apparatus for removing data from material in which the data has been embedded by the apparatus of claim 14, the removing apparatus comprising:

30

a remover for removing the data from the said second material to produce recovered material;

a deriver for deriving the said corrections and identifying data from the said store; and

a corrector arranged to use the stored corrections to correct the recovered material at the said locations identified by the identifying data.

5

18. A system comprising embedding apparatus according to claim 15 or 16, and removing apparatus according to claim 15 linked by a channel.

19. An apparatus or method according to any one of claims 1 to 18, wherein the said material is video material.

10

20. An apparatus or method according to any one of claims 1 to 18, wherein the said material is audio material.

21. An apparatus or method according to any one of claims 1 to 18, wherein the said material is audio-visual material

15

22. An apparatus or method according to anyone of claims 1 to 21, wherein the said data includes a UMID.

20

23. A computer program product arranged to carry out the method of any one of claims 1 to 9 and 19 to 22 when run on a computer.

24. A computer program product arranged to carry out the method of any one of claims 11 to 14 and 19 to 22 when run on a computer.

25

25. A method of embedding data in material substantially as hereinbefore described with reference to Figure 1 optionally together with one or more of Figures 2 to 12.

30

**ABSTRACT****EMBEDDING AND REMOVING DATA FROM MATERIAL**


A method of embedding data in material comprises the steps of:  
embedding data in original material to produce data embedded material;  
5 removing the watermark from the data embedded material to produce  
recovered material;  
comparing the original and recovered material to determine the differences and  
locations of differences therebetween; and  
storing the said locations and corrections which correct the said differences.

---

10 A method of removing the data embedded in the material, comprises the steps  
of:  
removing the data from the material to produce recovered material;  
deriving the said corrections and locations from the said store; and  
using the corrections to correct the recovered material at the said locations.

15

[Figure 1]

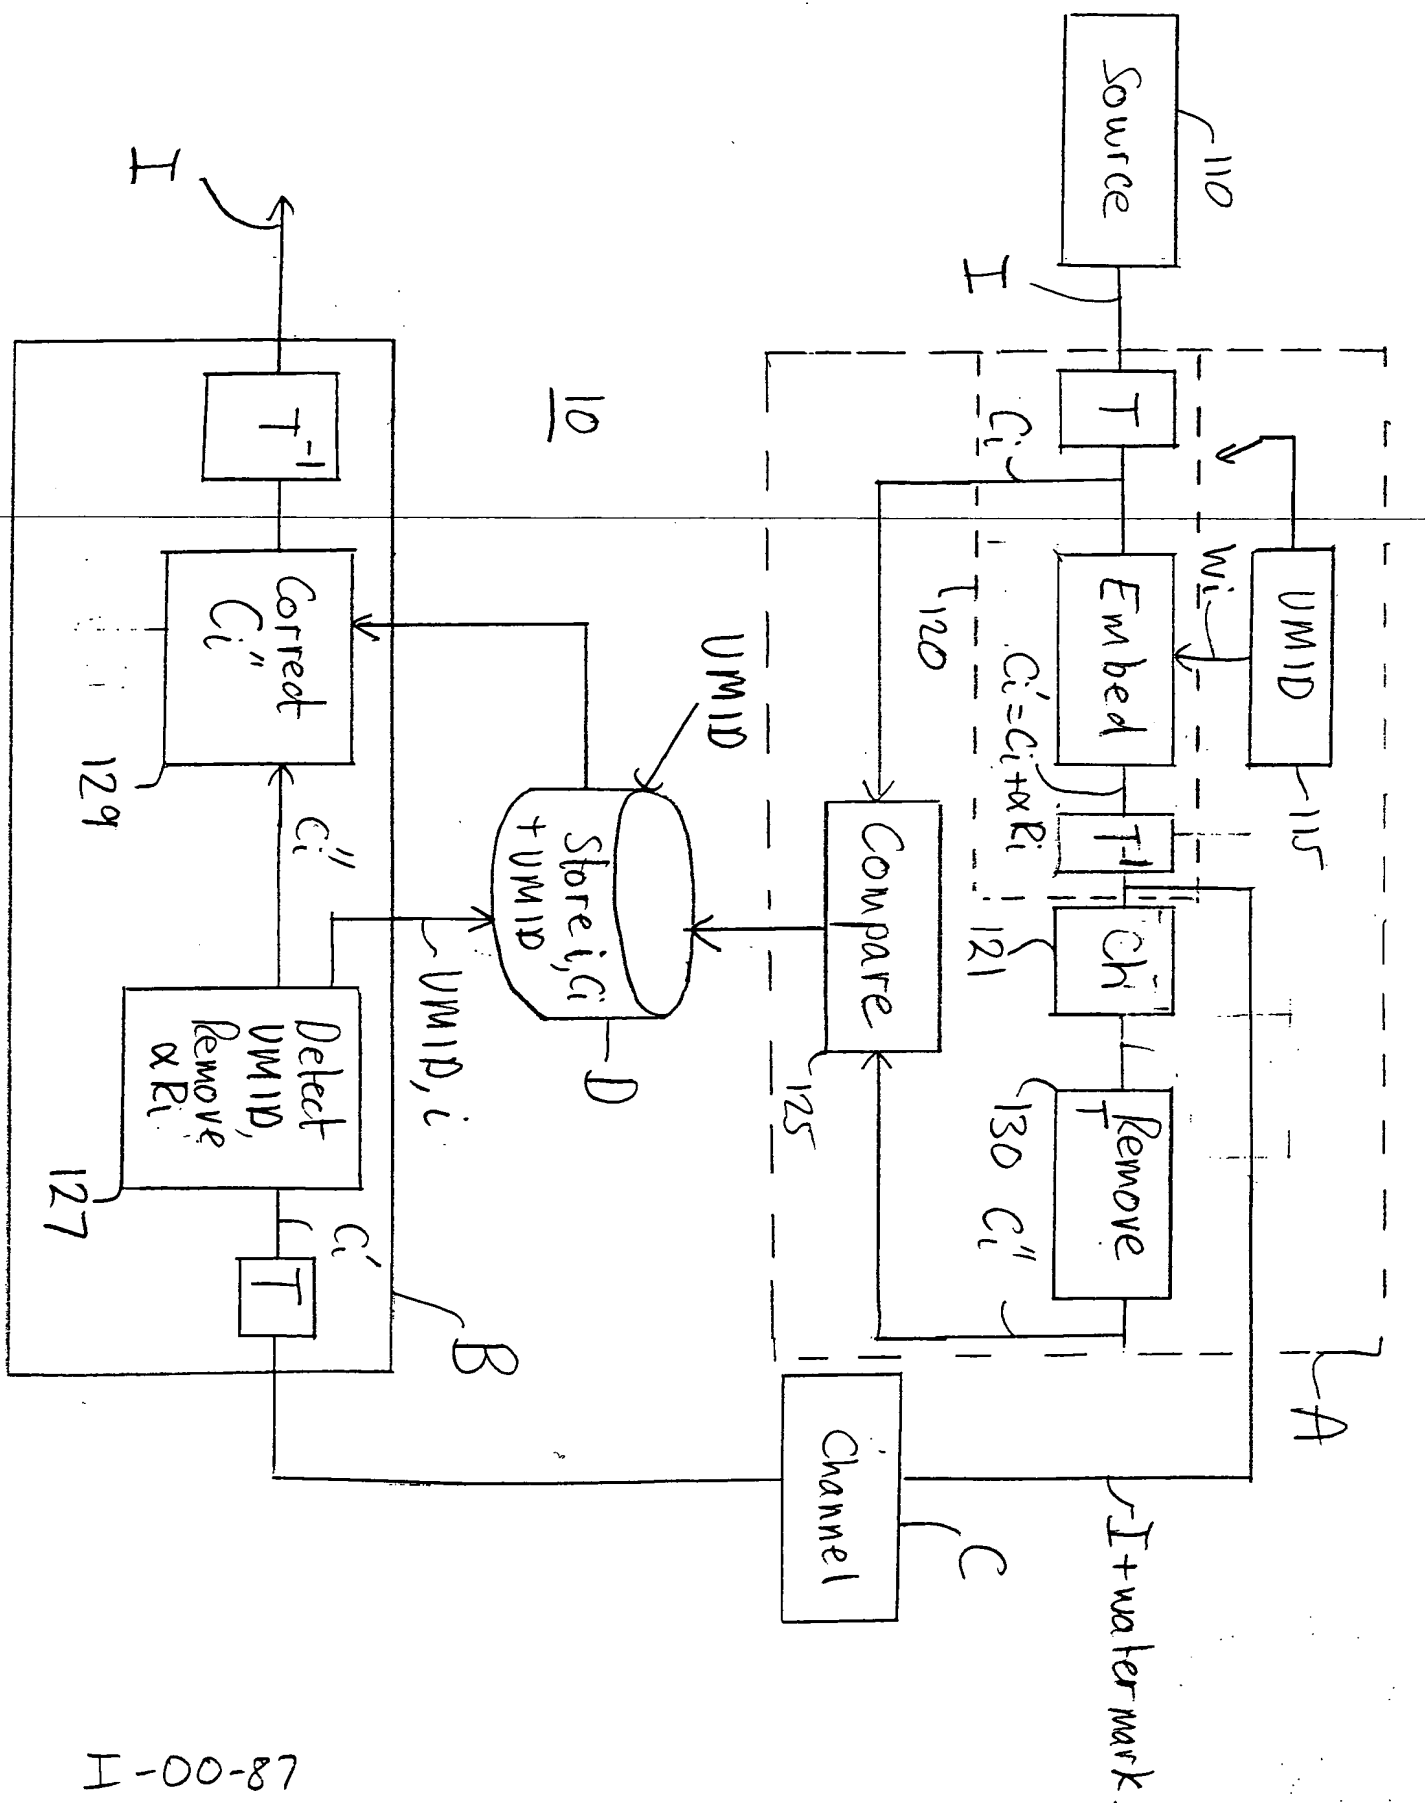



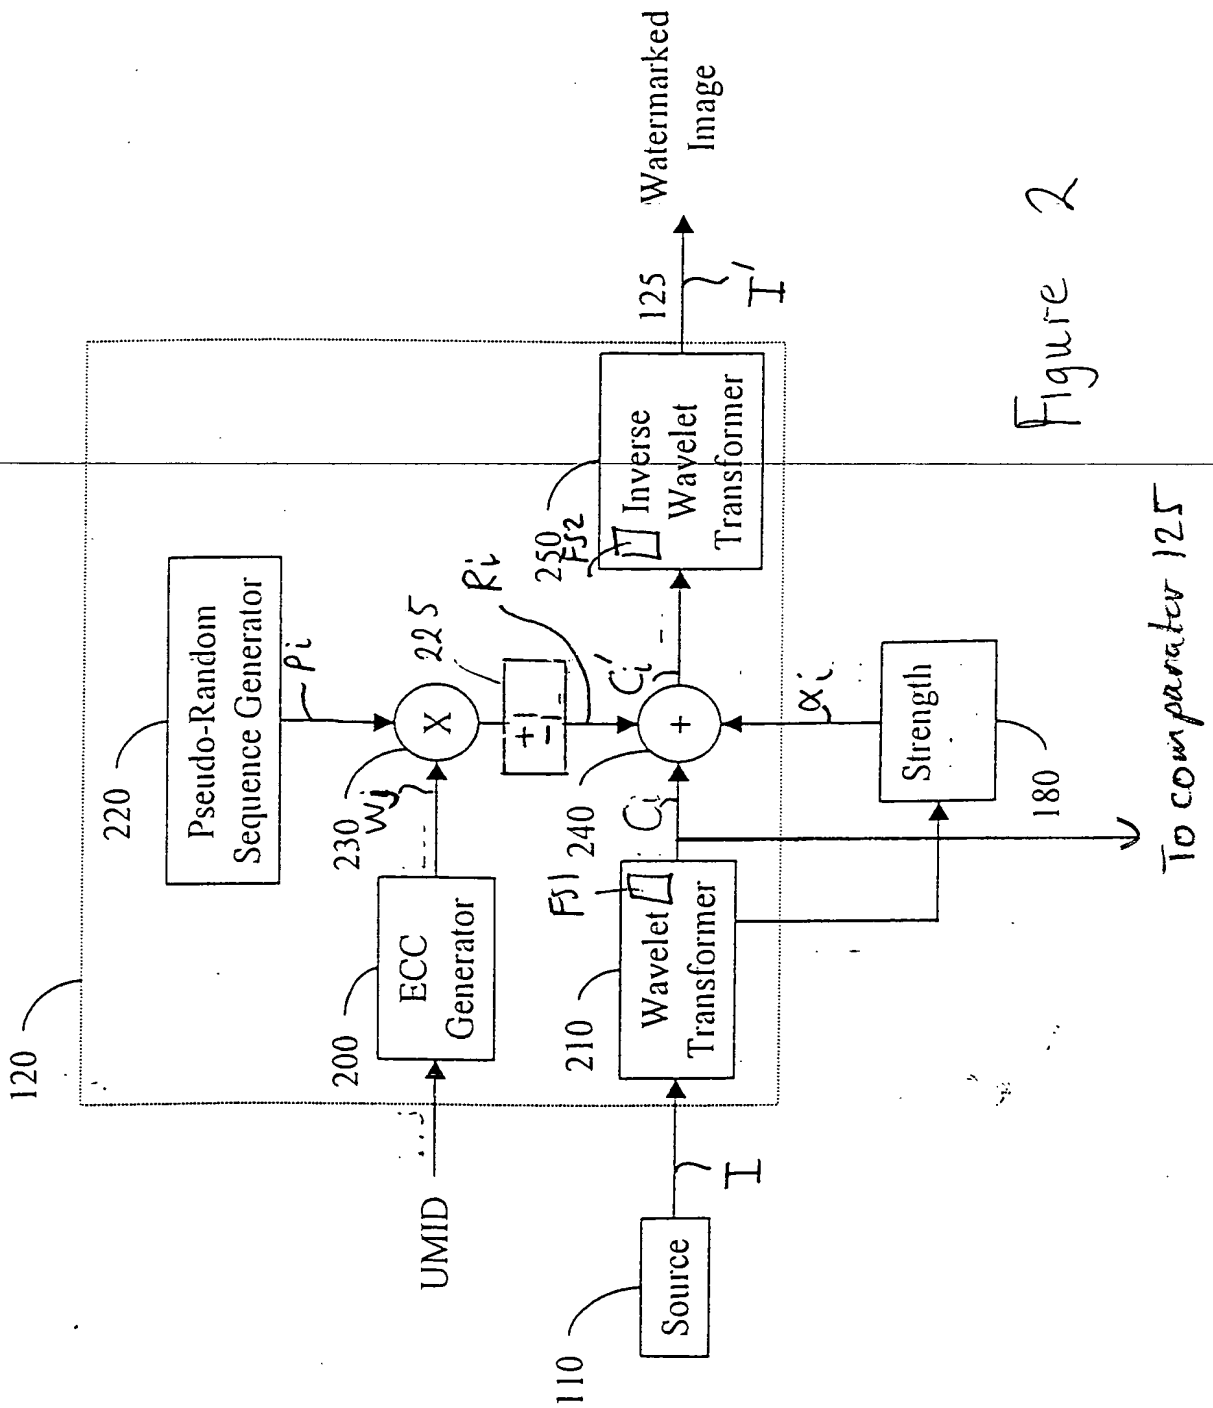


Figure 2

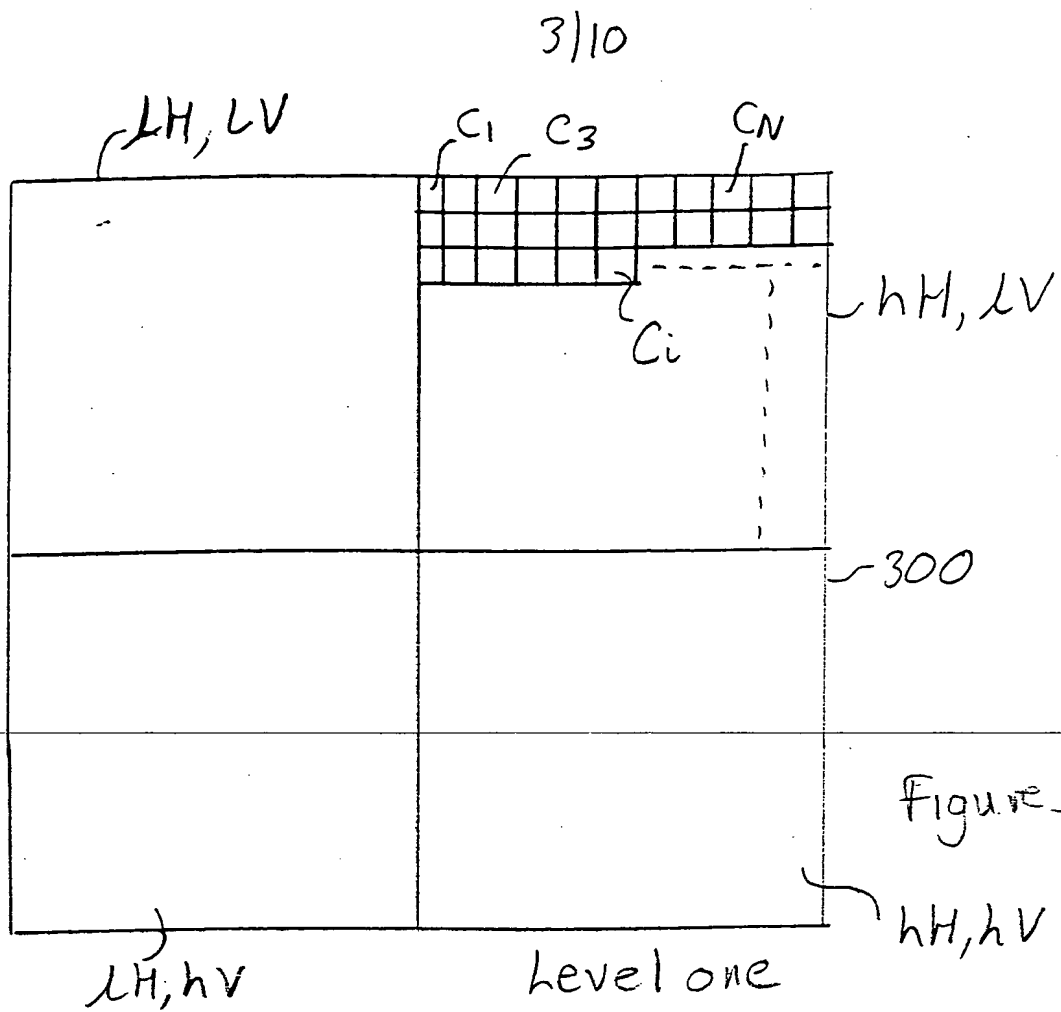


Figure 3A

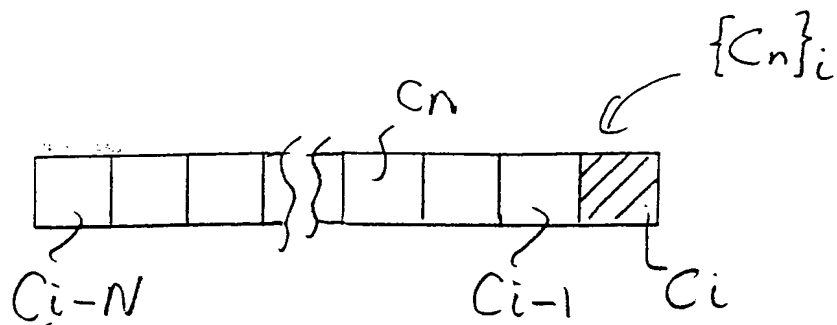


Figure 3B

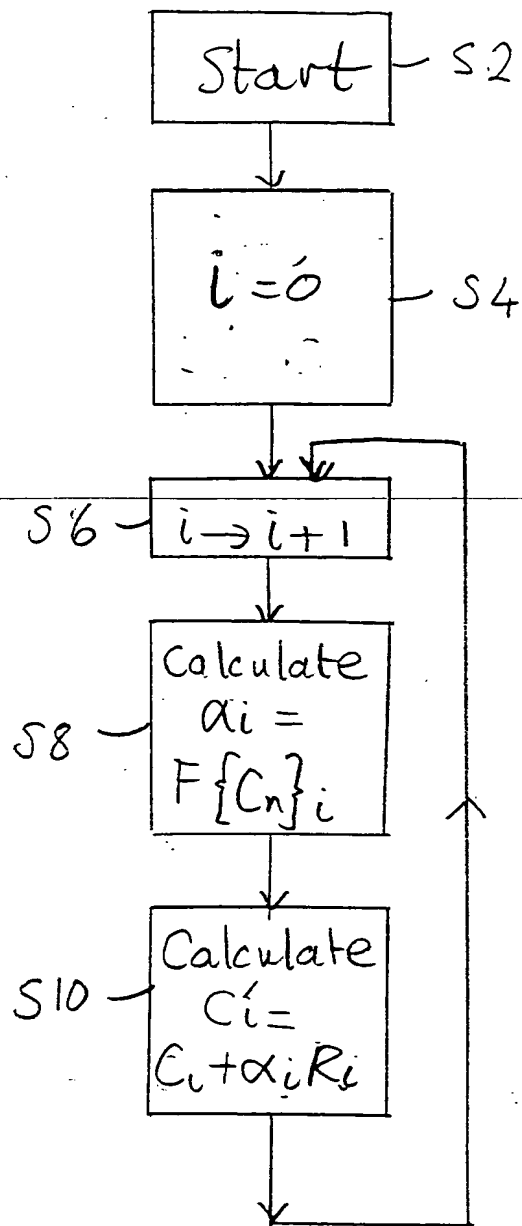


Figure 4

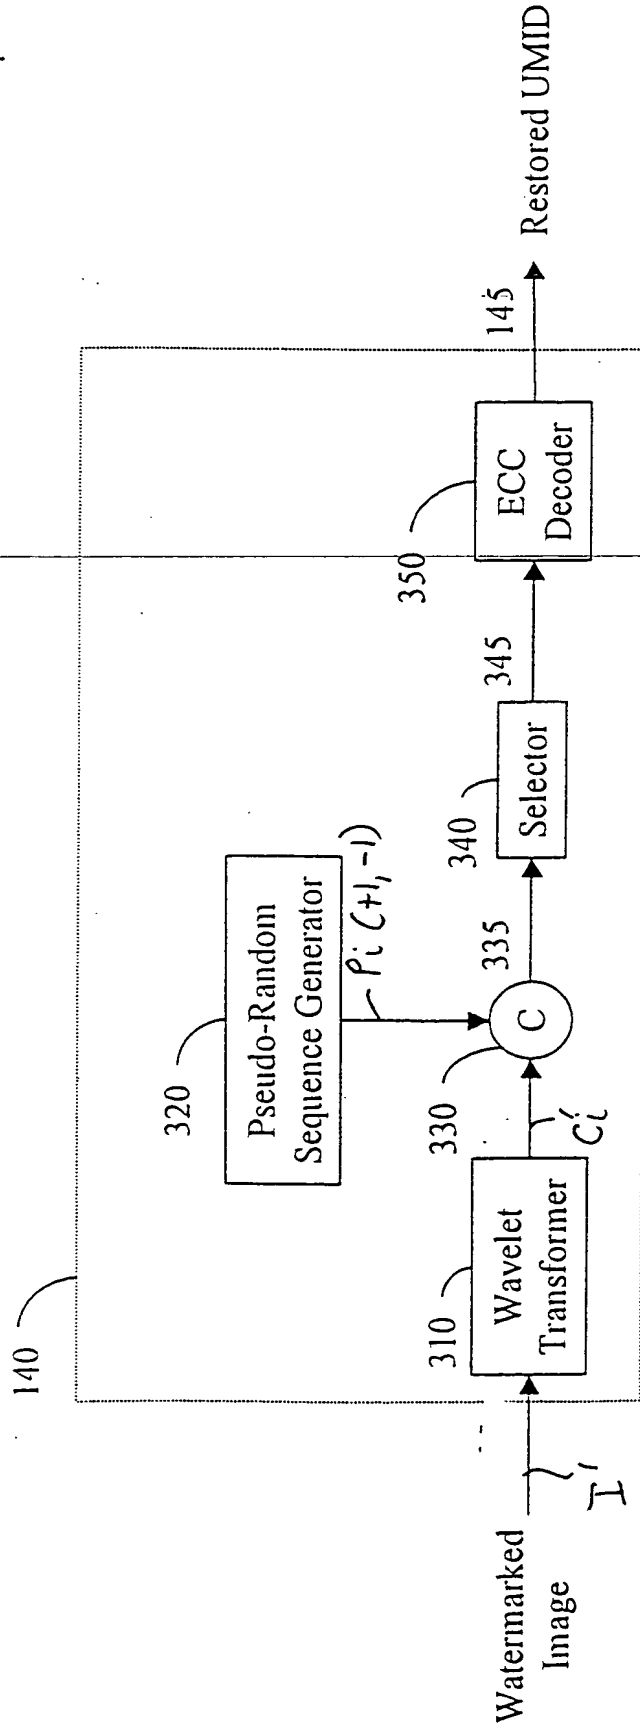


Figure 5

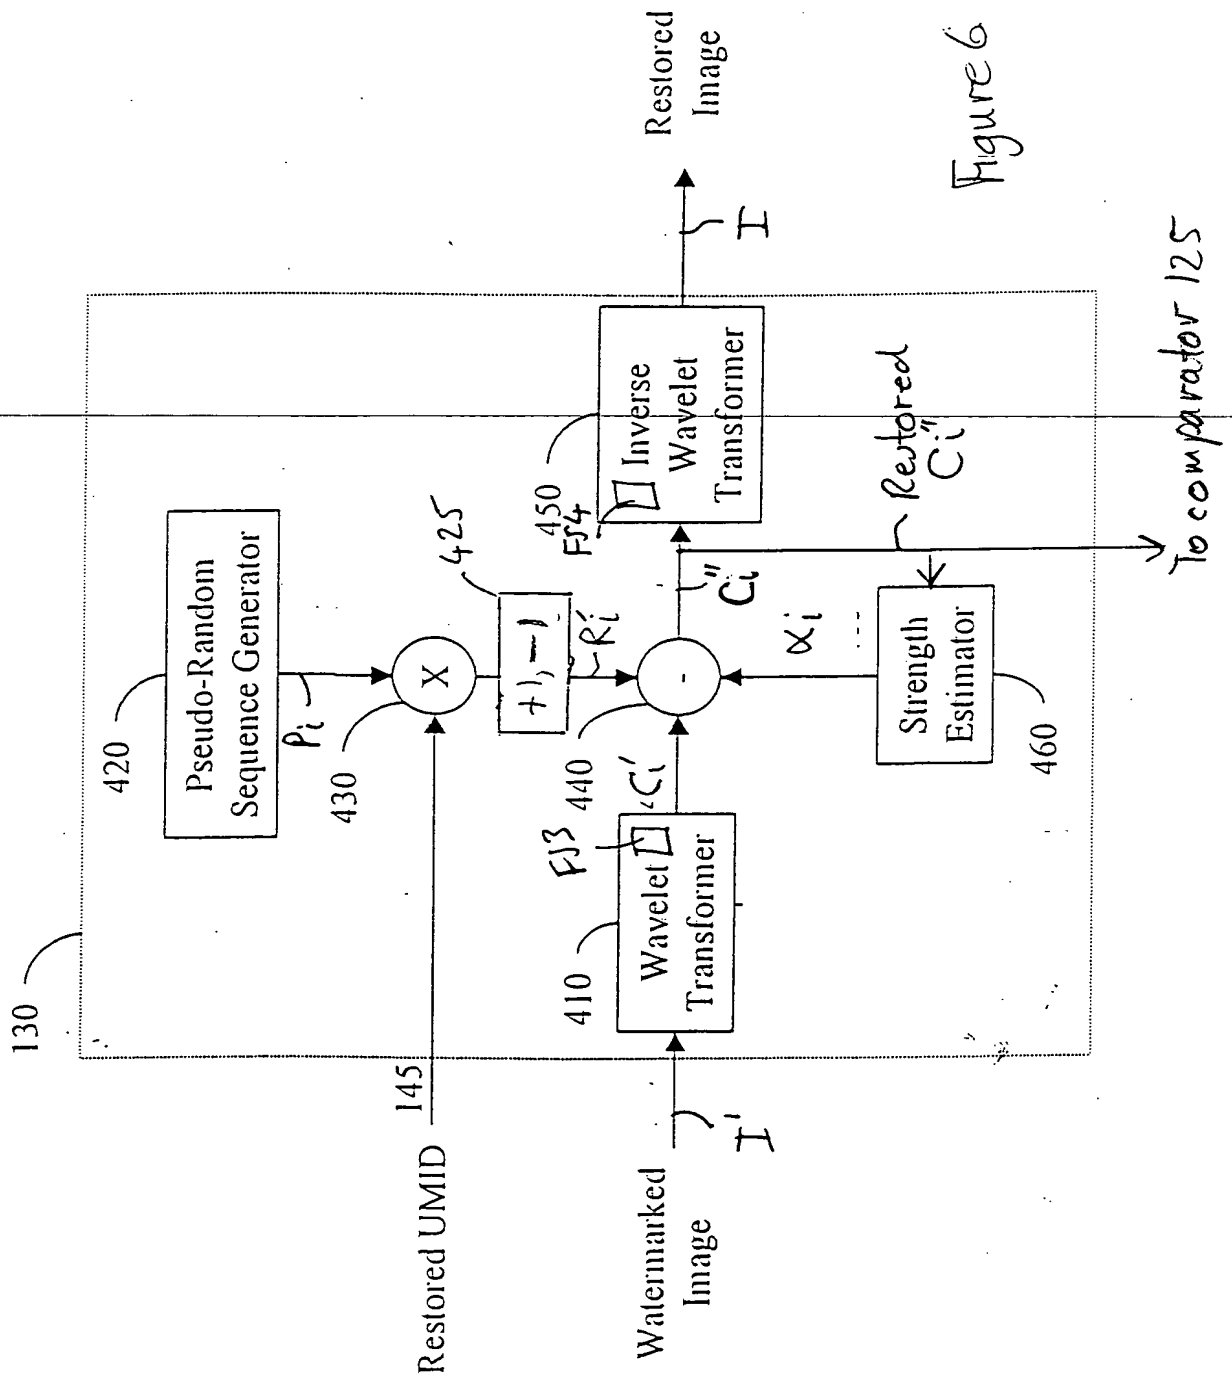


Figure 6


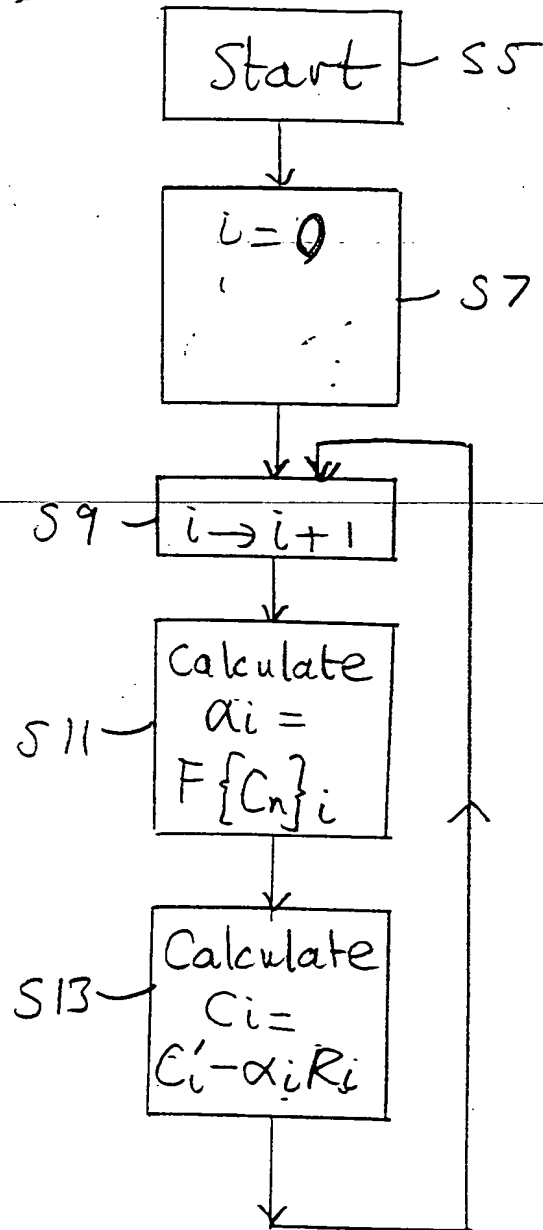


Figure 7.

8/10

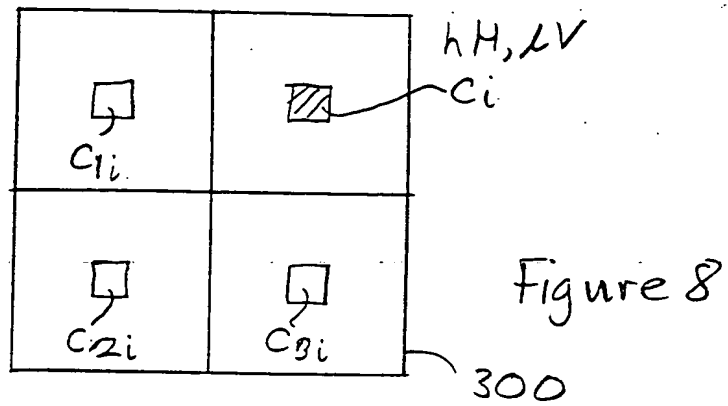

9/10

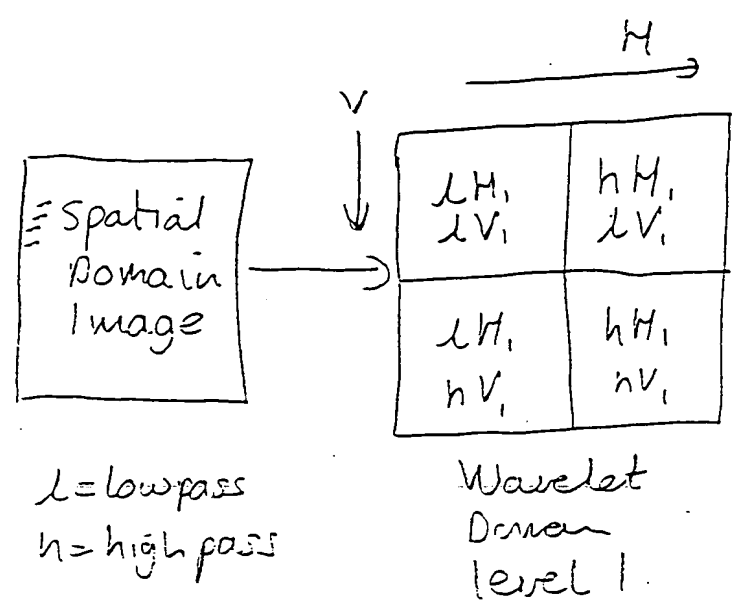


Figure 9


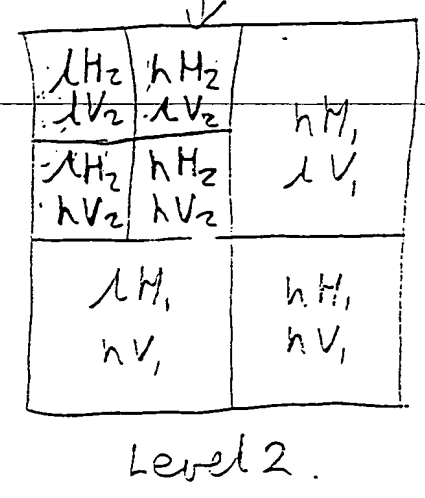


Figure 10

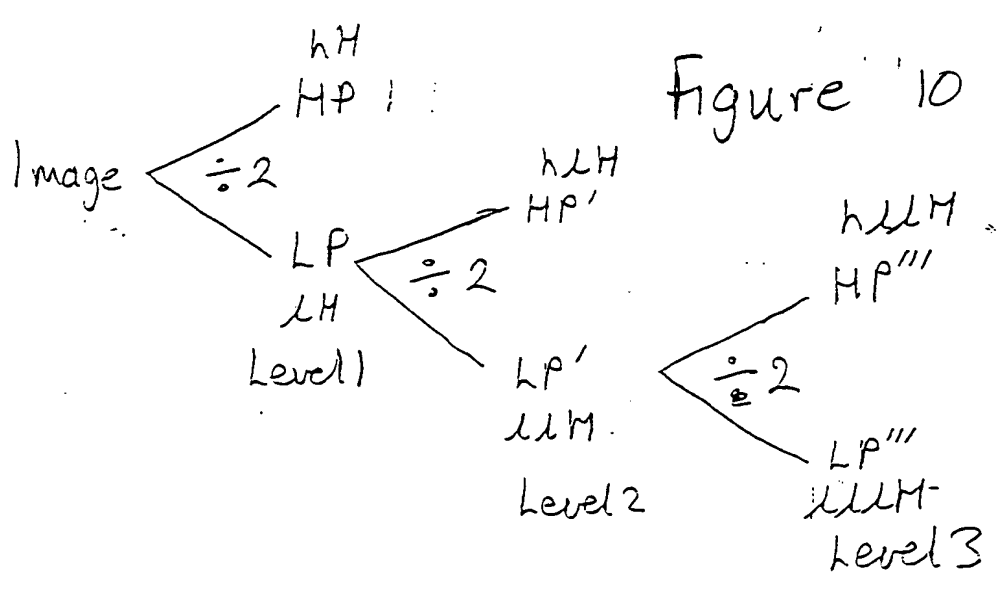

Schematic of Wavelet Transform.

BEST AVAILABLE COPY



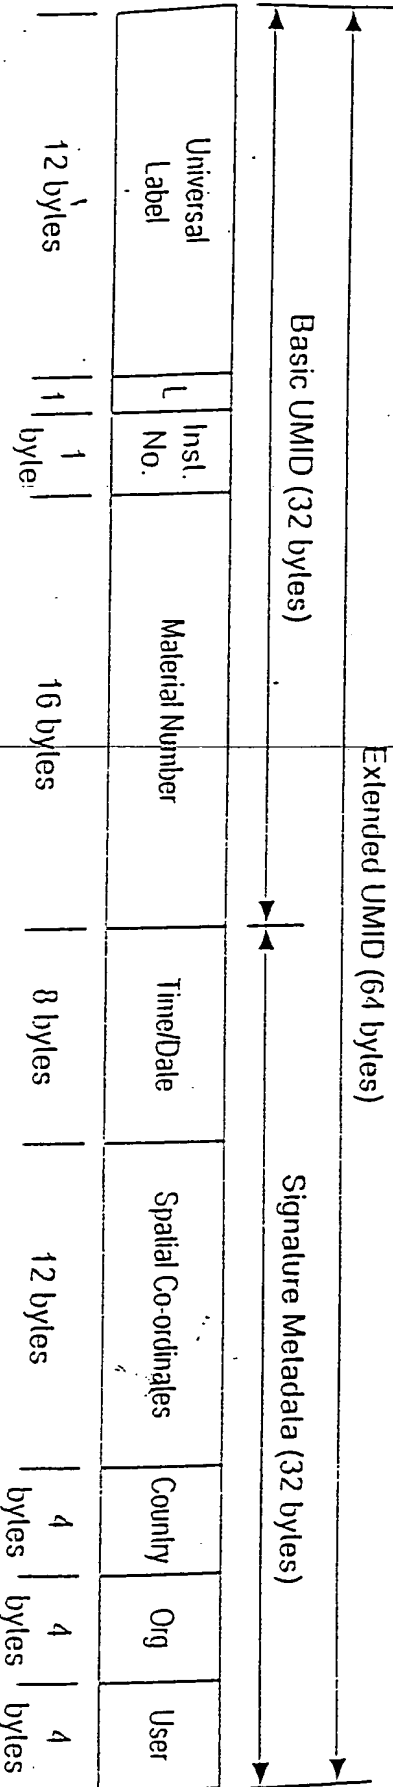


Fig. 11 Basic and Extended UMID Structures.

10/40

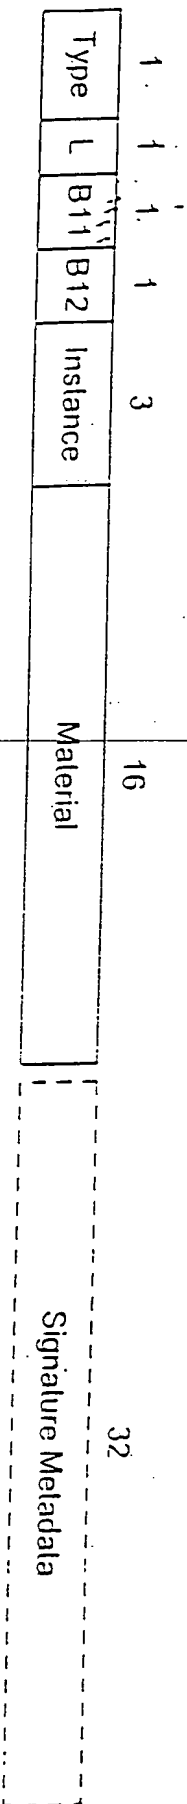


Fig. 12